


Temperature / Resistance / Potentiometer Transmitter

Product features

- Pt100 / Pt1000 sensors or resistance / potentiometer can be connected to the input
- 2 / 3 / 4 wire measurement
- -200 – +800 °C / 0-4000 ohm max. measurement ranges
- 0–20 mA / 4–20 mA current and 0–10 V / 2–10 V voltage output ranges
- 3 way isolation (input / output / power supply)
- High precision measurement
- Easy configuration via USB port
- 24 VDC ±10% or 230 V AC/DC ±10% supply voltage
- DIN rail housing, width: 12.5 mm



Type designation

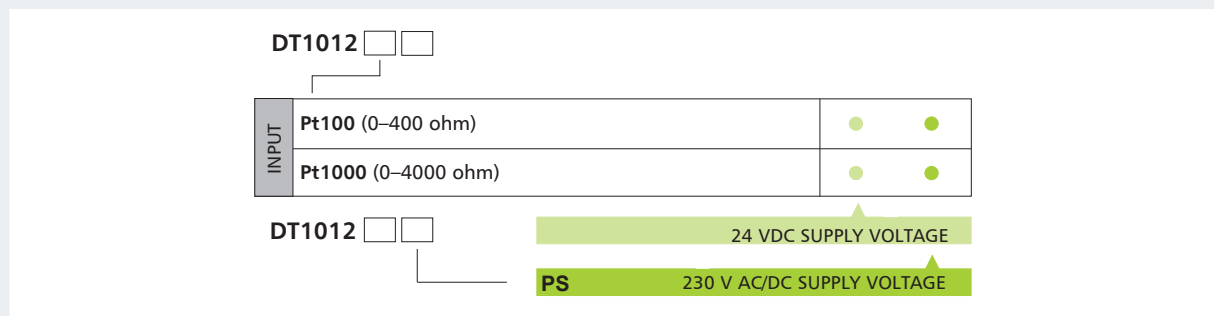

Pt100 / Pt1000 temperature sensors or linear resistance / potentiometer can be connected to the input of the **DT1012... Temperature / resistance / potentiometer transmitters**.

The transmitter feature complete 3-way isolation: the input the output and the power supply circuits are isolated of each other using state-of-the-art planar transformer design.

The transmitter has two outputs *:

- 0 – 20 mA / 4 – 20 mA current, or
- 0 – 5 V / 0 – 10 V / 2 – 10 V voltage

* only one output can be used at the same time

In the case of a Pt 100 / Pt 1000 temperature sensor, the output signal is proportional to the measured temperature, in the case of resistance to the measured resistance, in the case of a potentiometer, with the position of the potentiometer.

Sensors can be connected to the input with 2 / 3 / 4 wires. In the case of a 3/4-wire connection, the connecting wires resistance does not affect the measurement.

The transmitter can be configured via the USB port.

The characteristics that can be specified are:

input signal source, 2 / 3 / 4 wire measurement mode, measurement range, input signal averaging, output selection, output signal range, etc.

If a calibrated Pt100 or Pt1000 sensor is used, the calibration values can be downloaded to the transmitter.

The configuration software and the USB cable are included with the device.

The configuration program can also be downloaded from the company's website (www.datcon.hu).

The transmission characteristics of the transducer are exceptionally good: the error of the output signal < ±0.1 °C, the temperature coefficient is < ±20 ppm / °C typically.

The device can be ordered in two power supply versions:

- DT1012.. types 24 VDC ±10%,
- DT1012.. PS types 230 V AC/DC ±10%

Design: DIN rail housing, plugable terminal blocks with screw connection, width: 12.5 mm.

Safety data:

The DT1012 ... connection terminals of the supply voltage are isolated from each other; the isolation is in compliance with the standard EN 61010-1, taking into consideration the following:

Pollution level: 2
 Measurement category: II

Input parameters:

Input signal: Pt100 / Pt1000 sensor / resistance / potentiometer
 Connection: 2 / 3 / 4 wire

Measuring current:

Pt100, Pt1000: -200 – +800 °C @ scalable
 Linear resistance potentiometer: 0–400 ohm / 0–4000 ohm @ scalable
 Measuring current: 600 µA (Pt100) / 200 µA (Pt1000)

Output parameters:

Output signal: DC current or DC voltage on separate terminals
 (only one output can be used at a time)
 Ranges: 0–20 mA / 4–20 mA (current output)
 0–10 V / 0–5 V / 2–10 V (voltage output)
 Limitation: 22.5 mA (current output) / 11 V (voltage output)
 Load resistance: ≤ 650 ohm (current output) / ≥ 500 ohm (voltage output)
 Output resistance: > 5 Mohm (current output) / < 0.5 ohm (voltage output)
 Output error @ 25 °C ± 2 °C: 0.1 °C + 0.05% (max.)
 Temperature-coefficient: < 20 ppm / °C (tip.); < 50 ppm / °C (max.)
 Supply voltage dependence: negligible
 Settling time: 100 ms (no averaging)

Galvanic isolation:

Operating isolation voltage: 250 V_{eff} (between input, output and supply voltage terminals)
 Test voltage: 2500 VDC (1 min.)

Power supply:

Supply voltage: DT1012: 24 VDC ±10% • DT1012 PS: 230 V AC/DC ±10 %
 Consumption: DT1012: ≤ 1.5 W • DT1012 PS: ≤ 1,6 W / 2,2 VA

Environmental conditions:

Operating temperature range: 0 – 60 °C
 Storage temperature range: -20 – +70 °C
 Relative humidity: 90 % max. (non-condensing)
 Place of installation: cabinet
 Mounting position: vertically (horizontal rail)

Electromagnetic compatibility (EMC):

Emission (EN 55011): group 1, class B
 Immunity (EN IEC 61326-1): industrial environment

General data:

Design: DIN rail housing, width: 12.5 mm, material: PA6.6
 Electrical connection: plugable terminal blocks with screw connection
 Connecting wire cross-section: 0.25–2.5 mm (max.)
 Dimensions: 12.5 × 99 × 115 mm (width × height × depth)
 Weight: 0.1 kg
 Protection: IP 20

Detailed information see in operating instructions. The Manufacturer maintains the right to change the technical data!